

RK-606UC

Desktop/Wallmount Chassis with 6-slot Backplane for Full-Size SBC



Features

- Supports 6-slot ISA or ISA/PCI™ backplane
- Equipped with one 5.25" and one 3.5" front access drive bays
- Flexible hold down bar for cards
- Replaceable and easy-to-clean filter

Specifications

Dimensions	7.5 in x 9.7 in x 16.2 in (190.5 mm x 246.4 mm x 411.5 mm) (W x H x D)
Drive Bays	One 5.25" and one 3.5" front accessible drive bay Two internal 3.5" drive bays
Construction	Heavy-Duty cold-rolled Steel
Color	Standard: black
Cooling Fans	One 8-cm in-take fan, 49 CFM
Front Panel	LEDs: HDD active and system power System reset switch, ATX Power switch, optional AT power on/off switch Two USB connectors
Rear Panel	Supports 6-slot passive backplane
Carton Size	22 in x 13.2 in x 16.2 in (561 mm x 336 mm x 412 mm)
Weight	Net 7 kg (15.4 lb)

Mechanical Layout



Power Supply Options

Model Number	Watt	Input Range	Output (Max.)						Current Type
			+5V	+3.3V	+12V	-12V	-5V	+5Vsb	
APS-9130XU	300 W	90 – 264 VAC Full Range	24 A	20 A	20 A	0.5 A	0.5 A	1.5 A	ATX12V

Ordering Information



Model Number	Color	Backplane	Power Supply
NS-606UC-6S4-300	Black	HPCI-6S4	APS-9130XU

Backplane Options

Model Name	PICMG® CPU	PCI	ISA	PSU Connector
HPCI-6S4	1	4	1	ATX/AT

Dimensions

Units: mm

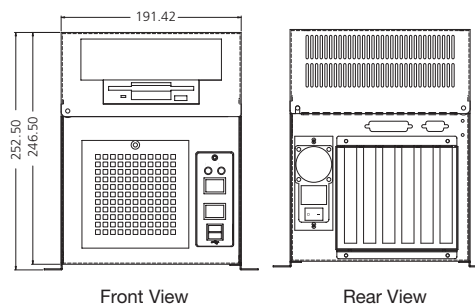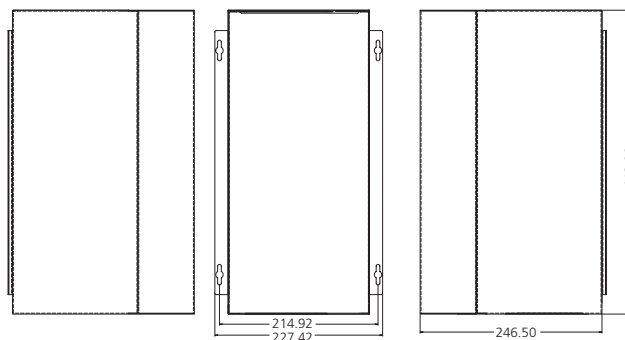

Front View

Rear View