
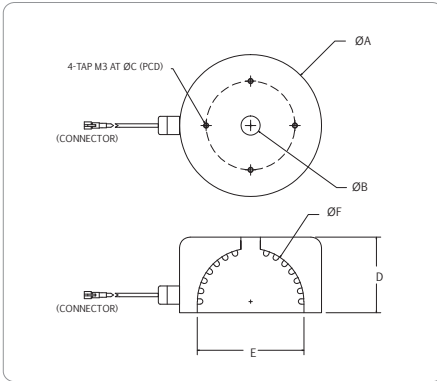


2017 Direct Illumination

IDD SERIES - Direct Dome Light Illumination

LED is mounted inside a dome, strong irradiation can be made at whole angles and extreme bright light.

Application: SMD LED inspection, SMD resistor, Crack and chip.

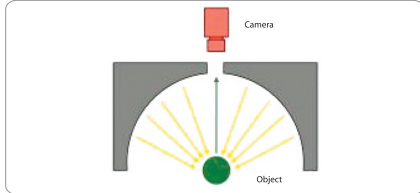

Technical Specification:

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions (MM)						Color	Voltage / Watt	Current	Weight (g)
	ØA	ØB	ØC	D	E	ØF				
IDD-00-045-4-X	55.0	12.0	40.0	23.5	40.0	40.0	<ul style="list-style-type: none"> ● 24V / 2.88W ● 24V / 3.60W 	120mA	80	
IDD-00-075-7-X	80.0	11.0	50.0	42.5	60.0	60.0	<ul style="list-style-type: none"> ● 24V / 7.92W ● 24V / 10.08W 	330mA	195	

Remark: 2 types of white are available- W: Cool White WW: Yellowish White

Optional Connector

Standard Lighting Male Connector

PIN 1	24V
PIN 2	-
PIN 3	GND

M8 Male Connector

M8 Pin Assignment

PIN 1	-	-
PIN 2	RED	24V
PIN 3	-	-
PIN 4	BLACK	GND

M12 Male Connector

M12 Pin Assignment

PIN 1	BROWN	24V
PIN 2	WHITE	-
PIN 3	BLUE	GND
PIN 4	BLACK	-
PIN 5	GRAY	-

Product Part Numbering System :
IDD-00-045-4-X-24V-**M8**

Product Part Numbering System :
IDD-00-045-4-X-24V-**M12**